Technology

Select

SELECT

Design awards

ΗB

Certificates

DVGW

Scale drawing

70

406

598

228


142

Description

•

oduct features 4 functions depending on volume flow and installation situation approx. 50% flow rate


- \cdot reduction and integrated shut off function
- · Select push-button on/off control for 4 outlets
- · simultaneous use of several outlets maximum flow
- · rate at 3 bar: 38 l/min flow rate per outlet: 26 l/min
- · flow rate by simultaneous use of all outlets: 38 l/min
- thermostat cartridge, Start/stop valve to operate the functions safety lock at 40 °C temperature limitation
- · adjustable non-return valve connection type: basic
- set min. operating pressure: 1 bar max. operating
- · pressure: 10 bar
- · Thermostat is delivered with buttons handshower,
- PowderRain, Waterfall, Rain large
- •

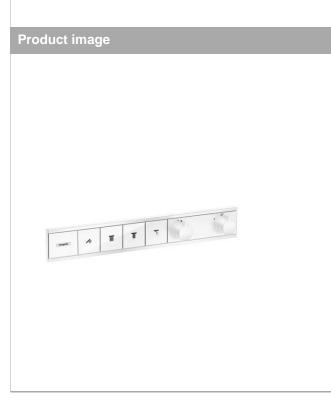

Installation examples

hansgrohe

RainSelect 1531218X / 15382XXX

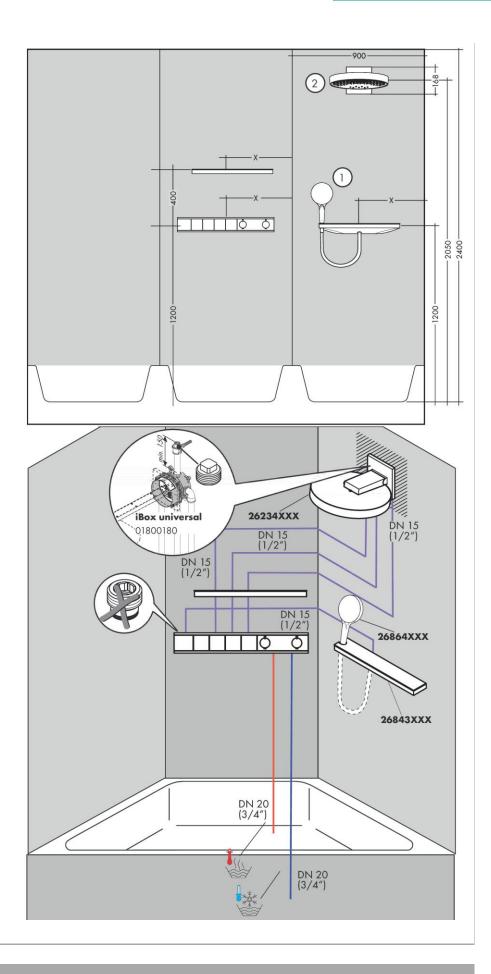

Exploded Drawing

Year of production: >07/19

hansgrohe

